


DNE170M-18

Electrical Data (STC)

Module Type	DNE170M-18
Peak Power (Pmax)	170
Maximum Power Voltage (Vmp)	19.51
Maximum Power Current (Imp)	8.71
Open Circuit Voltage (Voc)	23.22
Short Circuit Current (Isc)	9.32
Module Efficiency (%)	17.14
Maximum Power Tolerance	0-5W

PV Drawing

* STC: Irradiance 1000W/m², Module Temperature 25°C, AM 1.5

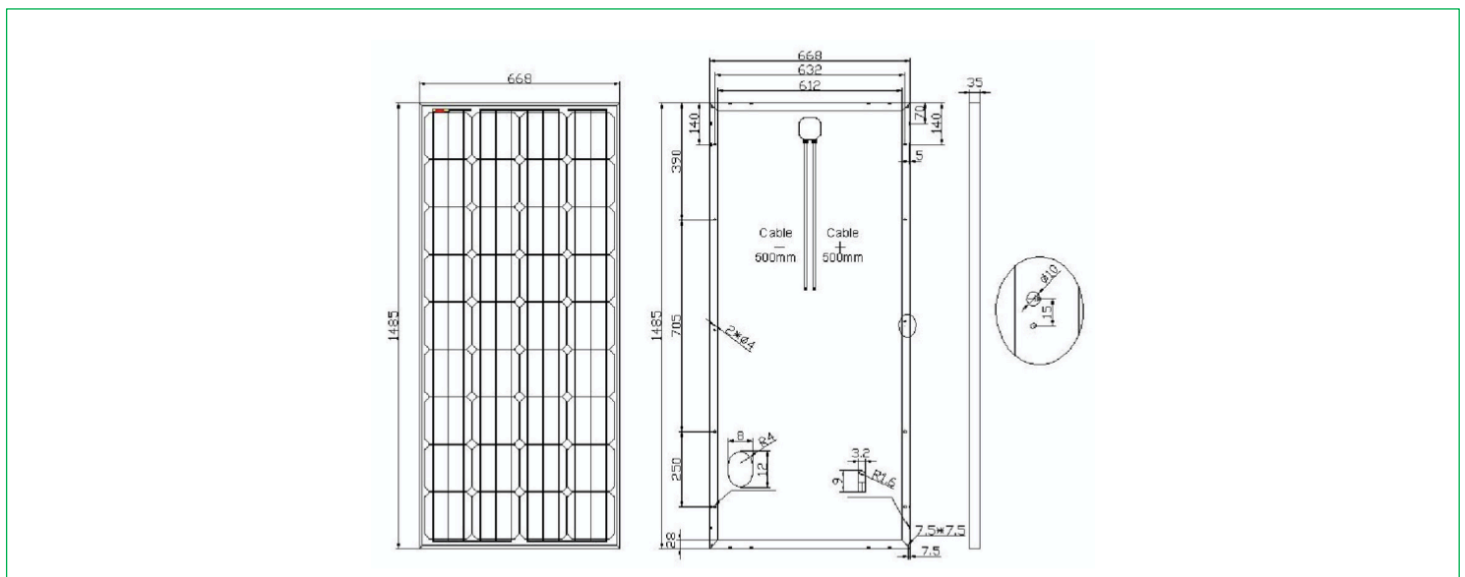

Mechanical Characteristics

Cell type	156*156 Mono
Cells Number	36 (4*9)
Dimensions	1485*668*35mm
Weight	11.6kgs
Front Glass	3.2mm high transmission, tempered glass
Frame	Anodized Aluminum Alloy
Junction Box	IP67/IP68
Output Cables	2.5mm ² , 500mm in length each
Connector	compatible with MC4 plug

Temperature & Maximum rating

Temperature Coefficients Isc (A/°C)	+0.04%/°C
Temperature Coefficients Voc (V/°C)	-0.380%/°C
Temperature Coefficients Pmax (W/°C)	-0.470%/°C
NOCT (°C)	45±2°C
Operating and Storage Temperature (°C)	-40°C ~ +85°C
Maximum System Voltage (V)	1000V
Maximum Series Fuse Rating (A)	10A
Max Wind Load/Snow Load	2400Pa/5400Pa
Application Class	A

